



**BOSCH**

# Greenstar 2000 Installer guide

New higher spec. Same great value

**7**  
Year  
Guarantee\*



Installer  
guide



**HEATBASE**  
HEATING & PLUMBING SERVICES

**WORCESTER**  
Accredited Installer



# Greenstar 2000

## We fed in what you fed back

You talked, we listened and everybody wins. From installer feedback we've made loads of improvements to the new Greenstar 2000, from extended flue lengths to increases in output, enhanced PRV access, an improved condensate trap, a new hydraulic assembly and more. Not forgetting that it's also Quiet Mark certified.

With so much more going for it, it's a better boiler offering even better value. Now more than ever, the Greenstar 2000 is a great value boiler.



## New higher spec. Same great value

One of our quietest and best value boilers ever, the Greenstar 2000 is a rapid fit and highly efficient option for smaller budgets.

And we've made it even better, here's what we've done...

**An easy to operate, affordable, high quality boiler.**

Carl @ CH Heating Services

**A favourite with our customers. Efficient, stylish and easy to use controls.**

David @ DRH Plumbing and Heating Ltd

**Stylish, affordable, quiet boiler that's also light & spacious inside!**

Luke @ B-Tech Heating


### Why install the Greenstar 2000?



**Guaranteed**  
7 years peace of mind\*



**Quiet Mark**  
Super quiet for customers



**Rear piping option**  
Flexibility for all installs



**Efficient**  
94% efficiency, the best in our entry-level range



**Flexible controls**  
Compatible with all Worcester RF controls



**Easy Installation**  
Installer-friendly PRV and condensate trap



⊕ Fully integrated 230V control board

⊕ Improved condensate trap

⊕ Improved PRV access



# Top value performance

## Installer-friendly connections

Gas and hydraulic connections are in-line and 35mm from the rear of the appliance. Simple push-fit condensate connection and 90-degree compression elbow supplied for PRV, all improve speed of installation.



## Easy access components

Better access to all key components including PRV, with a new hydraulic assembly, improved condensate trap and simple one-screw removal of the plate heat exchanger.



## Flexible controls

The Greenstar 2000 works with all Worcester Bosch plug and play RF controls and 230V options.



## Condensate trap

The new improved condensate trap comes with a simple push-fit connection and is easily removable. External termination of condensate is flexible and possible up to 3m (insulated pipe).

## Improved Performance

With 94% seasonal efficiency and a 1:10 modulation range, the new Greenstar 2000 delivers greater savings on your customers' bills.




## Accessories

The rear spacer frame accessory allows wall mounting with space behind the boiler for vertical piping, for quicker and neater installations.





# The inside story

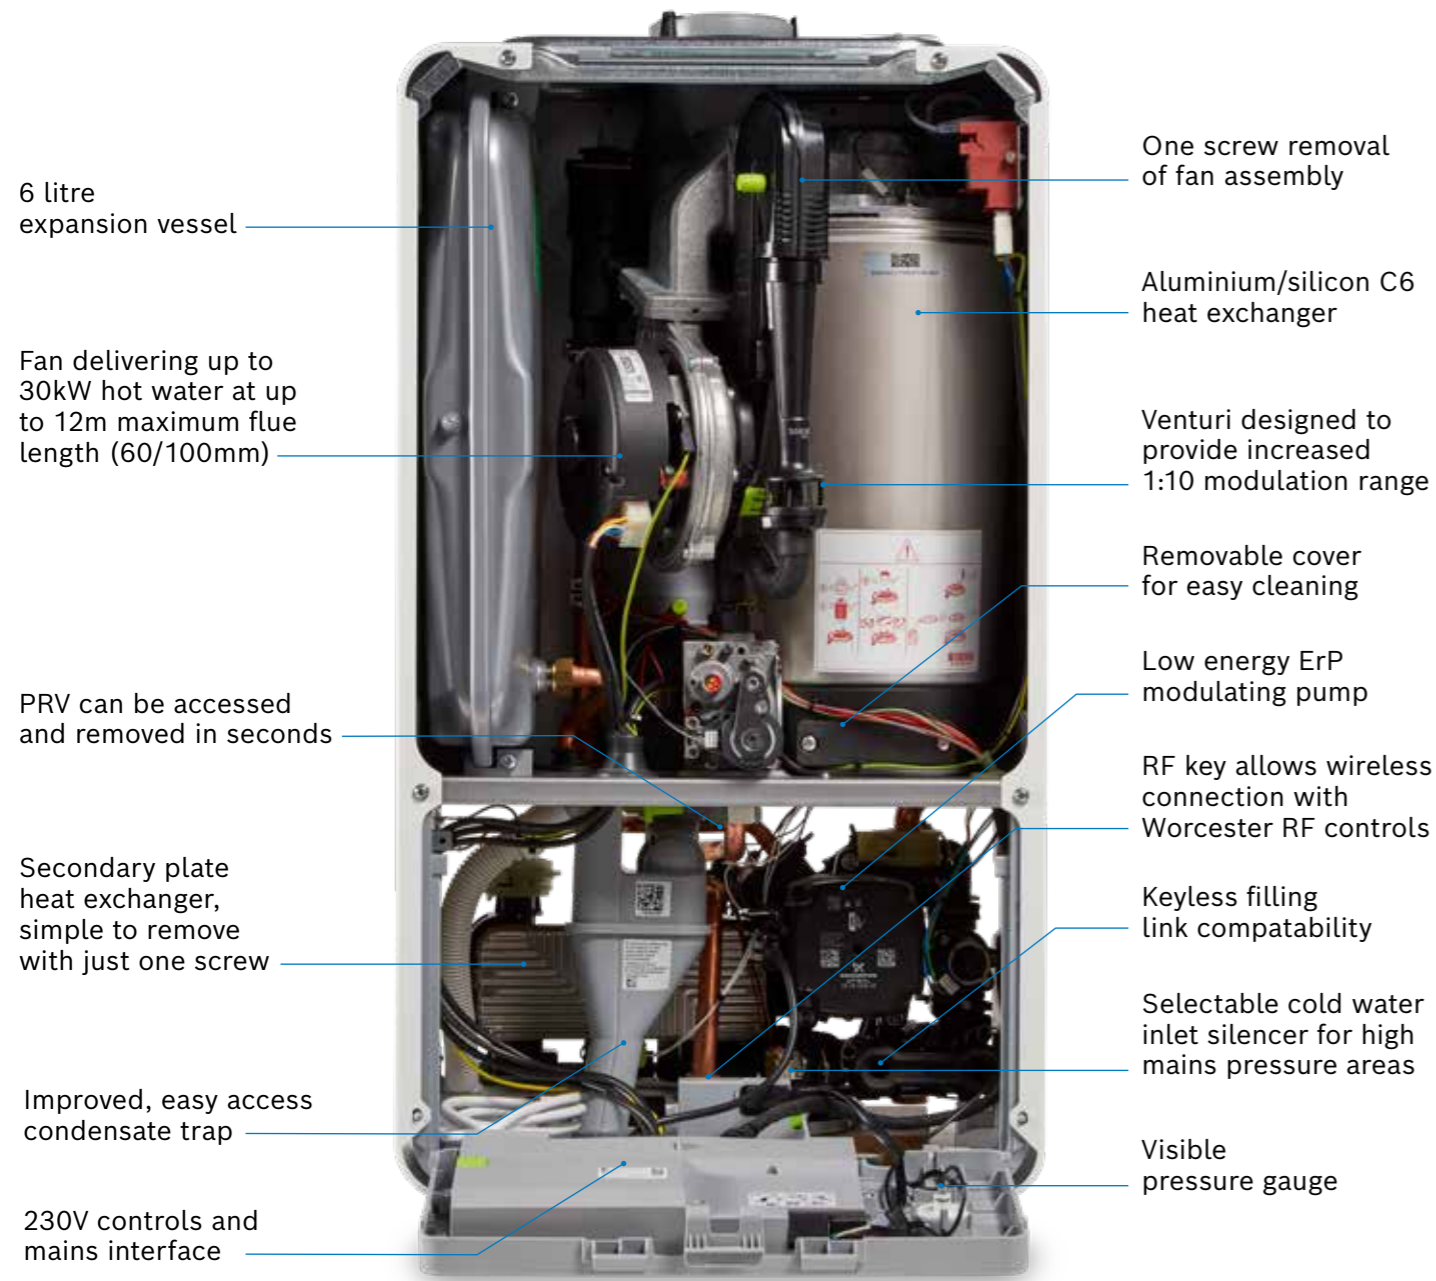

**The Greenstar 2000 offers customers a top value product - and now we've listened to installer feedback and made it even better.**

Olly Gwilliam, Worcester Bosch Product Manager

# Technical data

Model		2000 25kW	2000 30kW
<b>Part number</b>		7 736 902 326 - NG 7 736 902 328 - LPG	7 736 902 325 - NG 7 736 902 327 - LPG
<b>ErP space heating efficiency class</b>		A / 94%	A / 94%
<b>ErP hot water efficiency class</b>		A	A
<b>Dimensions</b>	Width	400mm	400mm
	Height	724mm	724mm
	Depth	300mm	300mm
<b>Clearances</b>	Above flue	30mm*	30mm*
	Sides	5mm	5mm
	Below	200mm	200mm
	Front	20mm**	20mm**
<b>Flow rate at the hot water (35°C ΔT)</b>		10 l/min***	12 l/min***
<b>Output kW to central heating (CH)</b>		3kW-24kW	3kW-24kW
<b>Sound power level dB(A)</b>		47	47
<b>Maximum flue length (60/100mm)</b>		12m horizontal & 12m vertical	12m horizontal & 12m vertical

\* Distance above cabinet for cleaning when vertical flues are used.  
 \*\* 20mm from a removable cupboard door, 600mm from a fixed surface for servicing. Same clearances for ventilated and unventilated compartments. 450mm front clearance to a fixed surface is permitted if a) 300mm clearance on one side is guaranteed b) the bottom of the boiler is between 1000mm and 1500mm from the ground and c) 450mm front clearance is maintained from ground level to boiler.  
 \*\*\* Minimum pressure required to achieve maximum flow rate = 1.5bar.

Related accessories	Part number
Rear Spacer Frame	7 736 902 361
Greenstar System Mini Filter 22mm	7 733 600 266
Greenstar System Filter 22mm	7 733 600 236
Greenstar System Filter 28mm	7 733 600 237
Remote PRV Kit	7 733 601 314
CondenseSure	7 716 192 746
Keyless Filling Link	7 716 192 610
Low NOx Code Plug Kit 25kW	7 736 902 357
Low NOx Code Plug Kit 30kW	7 736 902 355
DHW Pre-heat Kit	7 736 902 372

Flues	Part number
Standard Telescopic Flue and Terminal (White)	7 716 191 082
Extension Flue Kit (960mm)	7 716 191 083
Short Flue Extension (220mm)	7 716 191 113
90° Flue Bend	7 716 191 084
45° Flue Bend	7 716 191 085
Support Bracket Kit	7 716 191 177

# Get in touch

## Sales

Tel: 0330 123 9669

Email: [sales.bosch@uk.bosch.com](mailto:sales.bosch@uk.bosch.com)

## Technical Helpline (Pre & Post Sales)

Tel: 0330 123 3366

Email: [technical-advice@uk.bosch.com](mailto:technical-advice@uk.bosch.com)

## Spare Parts

Tel: 0330 123 9779

Email: [spares.mailbox@uk.bosch.com](mailto:spares.mailbox@uk.bosch.com)

## Controls Helpline

Tel: 0330 123 3641



## Training

Tel: 0330 123 0166

Email: [training@uk.bosch.com](mailto:training@uk.bosch.com)

[worcester-bosch.co.uk/eacademy](http://worcester-bosch.co.uk/eacademy)

# Share

We would love to see your installations!



Worcester Bosch Professional



@WorcesterBoschProfessional



@WorcesterBosch



Worcester Bosch



WorcesterBoschHeating

## Worcester Bosch

Cotswold Way

Warndon

Worcester

WR4 9SW

[worcester-bosch.co.uk](http://worcester-bosch.co.uk)

Calls to and from Bosch Thermotechnology Ltd may be recorded for training and quality assurance purposes. Worcester Bosch is a brand name of Bosch Thermotechnology Ltd. This brochure is accurate at the date of printing, but may be superseded and should be disregarded if specification and/or appearances are changed in the interest of continued improvement. The statutory rights of the consumer are not affected.

